

# TOC Series Oil Pumper Motors

## 3HP thru 125HP Design D foot mounted


- 213T thru 445T
- Cast Iron TEFC

### FEATURES

- Two-part epoxy paint,
- Moisture-resistant insulation,
- Shaft slinger, F2 position conduit box.

### APPLICATIONS

- Oil field pumps and applications requiring high torque & high slip

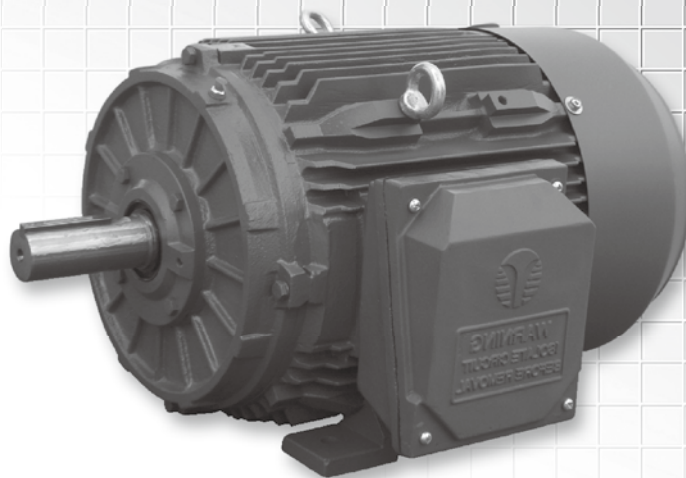

IEC MOTOR

FIRE PUMP MOTOR

GOST MOTOR

NEMA MOTOR

DC MOTOR

EC MOTOR

## TOC Oil Pumper Motors Technical Data

Model	Frame	HP	RPM	SF	Voltage	Hz	FLA	FLA	KVA Code	PF	Eff		DES	Ins Class	AMB	IP	FLA	FLA	LRA	LRT	BDT	Duty	Bearing	
							230V	460V			FL	3/4					208V	796V	230V	(%FL)	(%FL)		DE	NDE
TOC213T3U6B	213T	3	1123	1.15	230/460	60	8.8	4.4	J	77.0	82.7	83.2	D	F	40	55	9.7	2.53	54.6	325	345	Cont.	6308ZZ	
TOC215T5U6B	215T	5	1115	1.15	230/460	60	13.6	6.8	J	81.0	84.3	85.5	D	F	40	55	15.1	3.95	90.7	345	320	Cont.	6308ZZ	
TOC254T7.5U6B	254T	7.5	1110	1.15	230/460	60	20.4	10.2	G	83.0	84.0	85.4	D	F	40	55	22.6	5.91	117.3	280	230	Cont.	6309 C3	
TOC256T10U6B	256T	10	1138	1.15	230/460	60	26	13	H	83.0	87.0	87.3	D	F	40	55	28.8	7.53	160.2	278	250	Cont.	6309 C3	
TOC284T15U6B	284T	15	1139	1.15	230/460	60	38.2	19.1	G	84.0	87.7	87.9	D	F	40	55	42.3	11.05	229.6	285	250	Cont.	6311 C3	
TOC286T20U6B	286T	20	1115	1.15	230/460	60	49.6	24.8	G	88.0	86.4	87.9	D	F	40	55	54.8	14.32	286.7	300	270	Cont.	6311 C3	
TOC324T25U6B	324T	25	1135	1.15	230/460	60	60	30	F	86.0	90.7	91.4	D	F	40	55	66.5	17.38	334.2	345	320	Cont.	6312 C3	
TOC326T30U6B	326T	30	1136	1.15	230/460	60	71	35.5	F	86.0	91.1	91.9	D	F	40	55	78.5	20.51	390.5	290	360	Cont.	6312 C3	
TOC364T40U6B	364T	40	1135	1.15	230/460	60	92	46	F	89.0	91.5	92.5	D	F	40	55	101.8	26.60	562.1	278	280	Cont.	6313 C3	
TOC365T50U6B	365T	50	1138	1.15	230/460	60	111	55.5	F	91.0	91.9	92.8	D	F	40	55	122.8	32.09	691.5	285	250	Cont.	6313 C3	
TOC404T60U6B	404T	60	1135	1.15	230/460	60	135.2	67.6	F	90.0	92.0	93.0	D	F	40	55	149.5	39.07	830.1	280	280	Cont.	6316 C3	6314 C3
TOC405T75U6B	405T	75	1135	1.15	230/460	60	164	82	G	91.0	92.2	93.0	D	F	40	55	181.5	47.43	1067.6	278	285	Cont.	6316 C3	6314 C3
TOC444T100U6B	444T	100	1138	1.15	230/460	60	223.6	111.8	G	91.0	92.5	93.2	D	F	40	55	247.5	64.67	1442.2	280	300	Cont.	6319 C3	
TOC445T125U6B	445T	125	1139	1.15	230/460	60	279.2	139.6	G	91.0	92.6	93.2	D	F	40	55	308.7	80.67	1803.6	280	300	Cont.	6319 C3	